

Brady B-1010 On-Metal Rigid RFID Tag

TDS No. B-1010
Effective Date: 9/24/2018

Description

Brady On-Metal Rigid RFID Tags incorporate extended temperature range chip technology with durable label materials to withstand challenging environments on metal surfaces.

Print Technology

None: No printing

Material Type

Solid Epoxy

Adhesive

Acrylic-Rubber Hybrid

Shelf Life

2 years

User Memory

Dual-Record Memory: 2 kbits
Multi-Record Memory: 64 kbits

EPC Bank

Up to 496-bit EPC identifier

TID Bank

256 bits

Regulatory

ATA Spec 2000 Ch 9 Rev 2016.1
SAE AS5678A 2015-12

Label Dimensions

Units	English (in)			Metric (mm)			
	Catalog Number	Width	Length	Thickness	Width	Length	Thickness
	RGD-LM-STK-1010-RFID	1.4	0.3	0.002	36.4	7.0	4.4
	RGD-LM-NKL-1010-RFID	0.6	0.6	0.002	14.0	14.0	5.8
	RGD-HM-TYL-1010-RFID	0.6	0.4	0.002	14.0	9.0	5.3

Thickness is measured at the center of the tag over the epoxy bump which is 16 mils tall (0.4 mm).

Label Mass

Catalog Number	Label Mass (g)
RGD-LM-STK-1010-RFID	1.9
RGD-LM-NKL-1010-RFID	2.0
RGD-HM-TYL-1010-RFID	1.2

Approximate Read Range

Catalog Number	Surface	Average Read Range (m)*
RGD-LM-STK-1010-RFID	Aluminum	2.92
RGD-LM-NKL-1010-RFID	Aluminum	1.91
RGD-HM-TYL-1010-RFID	Aluminum	0.92

*Results dependent on conditions used for testing, actual performance will vary depending on environment and substrate composition. See *Read Range and Orientation Testing Methodology* for additional detail.

Surface Dependent Testing

*Surface Dependent Read Range**

Tag Size	STK		NKL		TYL	
	ETSI Average (m)	ETSI Average (m)	ETSI Average (m)	FCC Average (m)	ETSI Average (m)	FCC Average (m)
Aluminum	3.97	1.73	1.73	1.94	0.74	1.08
Stainless Steel (CRES)	3.84	1.58	1.58	1.89	0.72	1.08
Titanium	3.77	1.67	1.67	1.91	0.69	1.16
Fiberglass electrical grade	0.98	1.14	1.14	1.02	0.60	0.31
PEEK Composite	4.22	1.87	1.87	2.15	0.88	1.05
PPS Composite	3.84	1.73	1.73	1.92	0.80	0.92

*Results dependent on conditions used for testing, actual performance will vary depending on environment and substrate composition. See *Read Range and Orientation Testing Methodology* for additional detail.


Surface Adhesion

Material	Peel Average (N/25mm)	Peel Average (oz/in)
CRES	20.3	74.4
Aluminum with interior TC	15.7	57.6
PEEK Composite	15.5	56.9
PPS Composite	14.4	53.0
Fiberglass A13RG2W	14.8	54.4
Titanium	12.9	47.2

Adhesion values reported were an average of a sample set.

Orientation

Orientation Testing

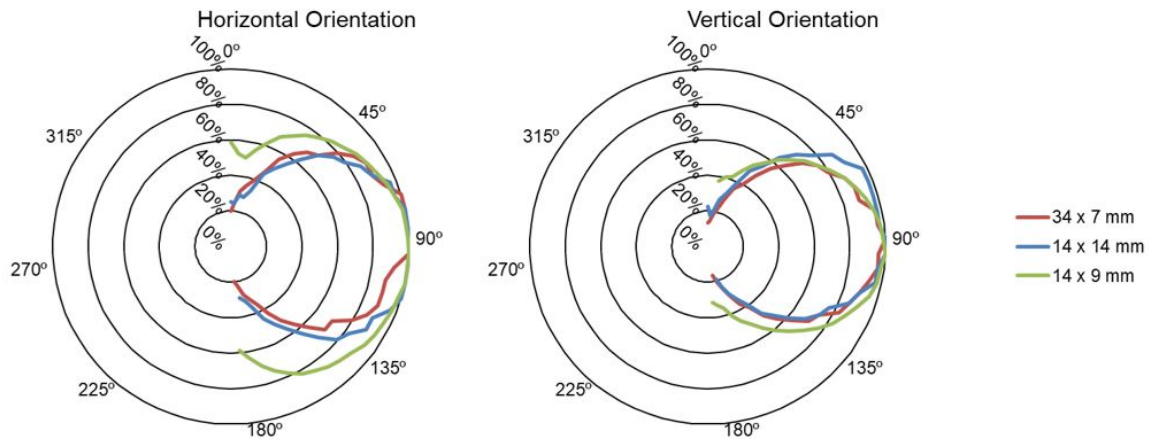

Read Range and Orientation Methodology

Read range and orientation measurements were performed using a patch antenna in an anechoic environment. Sample to antenna distance used for read range measurements was 1 m for all tags. EU read range was measured at 866 MHz and US read range was measured at 905 MHz. Surfaces tested were 0.062” thick. US measurements were adjusted by +11% to account for US antenna power. Results will vary in different application environments.

Environmental Testing

AS5678 Environmental Compliance

The Brady On-Metal Rigid RFID Tag is AS5678 2006-12 compliant for the following environmental tests.

Environmental Requirement*	Environmental Test Reference Document	Performance Standard	Pass/Fail
Operating temperature	RTCA DO-160E, Section 4	Data integrity	Pass
Survival temperature	RTCA DO-160E, Section 4	Data integrity	Pass
Altitude test	RTCA DO-160E, Section 4	Data integrity	Pass
Decompression test	RTCA DO-160E, Section 4	Data integrity	Pass
Over pressure test	RTCA DO-160E, Section 4	Data integrity	Pass
Humidity	RTCA DO-160E, Section 6	Data integrity	Pass
Operational shocks	RTCA DO-160E, Section 7	Data integrity	Pass
Vibration	RTCA DO-160E, Section 8	Data integrity	Pass
Magnetic Effect	RTCA DO-160E, Section 15	Data integrity	Pass
Flammability	CFR, Section 25.853(a)	Flammability per CFR limits	Pass

AS5678 Fluid Susceptibility

The Brady On-metal Rigid RFID Tag was exposed is compliant with the following fluids as tested per AS5678 standards using DO-160E Section 11.

Exposure	Method	Power effectiveness Pass/Fail*	Data Integrity Pass/Fail*
Skydrol LD4	Immerse	Pass	Pass
Skydrol LD4	Brush	Pass	Pass
Kerosene	Immerse	Pass	Pass
Kerosene	Brush	Pass	Pass
Petroleum Oil	Immerse	Pass	Pass
Petroleum Oil	Brush	Pass	Pass
Synthetic Oil	Immerse	Pass	Pass
Synthetic Oil	Brush	Pass	Pass
Alpine RF-11	Brush	Pass	Pass
Cryotech Polar Guard	Immerse	Pass	Pass
Cryotech Polar Guard	Brush	Pass	Pass
DI Water	Immerse	Pass	Pass
FE36	Brush	Pass	Pass
MEK	Brush	Pass	Pass
MIL 7808 Oil	Brush	Pass	Pass
Aeroshell Grease	Brush	Pass	Pass
IPA	Brush	Pass	Pass

*Additional Environmental Testing**

Exposure	Exposure Temperature(°C)	Exposure Duration (hr)	Method	Power effectiveness Pass/Fail*	Data Integrity Pass/Fail*	Adhesion*
Skydrol LD4 Immerse	23	336	Immerse	Pass	Pass	Pass
Skydrol LD4 Brush	70	1000	Brush Daily	Pass	Pass	Pass
Kerosene	23	500	Brush Daily	Pass	Pass	Pass
Mil 7808 Oil	70	500	Brush Daily	Pass	Pass	Pass
IPA	23	500	Brush Daily	Pass	Pass	Pass
MEK	23	500	Brush Daily	Pass	Pass	Pass
Alpine RF-11	23	500	Brush Daily	Pass	Pass	Pass
Cryotech Polar Guard Advance Type IV	23	500	Immerse	Pass	Pass	Pass
Aeroshell Grease 33	70	24	Brush Once	Pass	Pass	Pass
Fire Extinguisher FE36	23	24	Brush Daily	Pass	Pass	Pass
Corrosion	23	96	5% Salt Spray	Pass	Pass	Pass
Humidity Cycling (External)	30°C – 55°C	18, 6 cycles (108 total)	95% Humidity, Cycle Temp	STK & NKL Pass TYL Fail	Pass	Pass
Humidity Cycling (Internal)	30°C – 50°C	18, 2 cycles (48 total)	95% Humidity, Cycle Temp	Pass	Pass	Pass
Waterproofness	23	0.25	DO-160E, Section 10	Pass	Pass	Not Applicable

*Results dependent on conditions used for testing, actual performance will vary depending on environment and substrate composition. See *Environmental Testing Methodology* for additional detail.

Environmental Testing Methodology

RF Performance, adhesion, and visual defects were evaluated. Aluminum test panels were used for immersion testing, brush testing, and environmental exposures. Initial samples were adhered to test panels and tested for average minimum transmitted power (MTP) between 860 and 930 MHz. Initial samples were written with random bits and recorded. RF performance was evaluated in terms of power effectiveness. Power effectiveness of greater than 50% in comparison to a control earned a passing grade. Adhesion values were an average of a sample set. Adhesions of unexposed samples were used as controls. Adhesion performance was calculated as percentage difference of exposed samples to control sample adhesion. Samples with average adhesion above 9.5 N/25 mm to stainless steel earned a passing grade.

Shelf life is two years from the date of receipt for this product as long as this product is stored in its original packaging in an environment below 80° F (27° C) and 60% RH. It remains the responsibility of the user to assess the risk of using this product. We encourage customers to develop testing protocols that will qualify a product's fitness for use in their actual application.

Trademarks:

- SAE: Society of Automotive Engineers
- ASTM: American Society for Testing and Materials (U.S.A.)
- RTCA DO-160E: Environmental Conditions and Test Procedures for Airborne Equipment
- CFR: Code of Federal Regulations (U.S.A.)
- FAA TSO: Federal Aviation Administration Technical Standard Orders (U.S.A.)

Note: All values shown are averages and should not be used for specification purposes.

Test data and test results contained in this document are for general information only and shall not be relied upon by Brady customers for designs and specifications, or be relied on as meeting specified performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact Brady for further information.

Product compliance information is based upon information provided by suppliers of the raw materials used by Brady to manufacture this product or based on results of testing using recognized analytical methods performed by a third party, independent laboratory. As such, Brady makes no independent representation or warranties, express or implied, and assumes no liability in connection with the use of this information.

All S.I. Units (metric) are mathematically derived from the U.S. Conventional Units.

WARRANTY

Brady products are sold with the understanding that the buyers will test them in actual use and determine for themselves their adaptability to their intended uses. Brady warrants to the buyers that its products are free from defects in material and workmanship, but limits its obligations under this warranty to replacement of the product shown to Brady's satisfaction to have been defective at the time Brady sold it. This warranty does not extend to any persons obtaining the product from the buyers. This warranty is in lieu of any other warranty, express or implied, including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose, and any other obligations or liability on Brady's part. Under no circumstances will Brady be liable for any loss, damage, expense, or consequential damages of any kind arising in connection with the use, or inability to use, Brady's products.

Copyright 2018 Brady Worldwide, Inc. | All Rights Reserved

Material may not be reproduced or distributed in any form without written permission